

Smart Cabinet Steamer

深圳鼎华厨房电器有限公司

SHENZHEN DINGHUA KITCHEN EQUIPMENT CO.,LTD

深圳市龙岗区福城街道茜坑社区观澜大道100号芷峪澜湾花园F座6G

14A3H, Building A, Zhujiang Plaza, Longcheng Street,

Longgang District, Shenzhen

电话: 139 2282 9027

邮箱: 422726815@qq.com

网址: www.dinhua.com / www.dinhua.cn

热线电话: 400-806-8288




深圳鼎华厨房电器有限公司
SHENZHEN DINGHUA KITCHEN EQUIPMENT CO.,LTD



鼎华引领 厨房革命 新潮流!



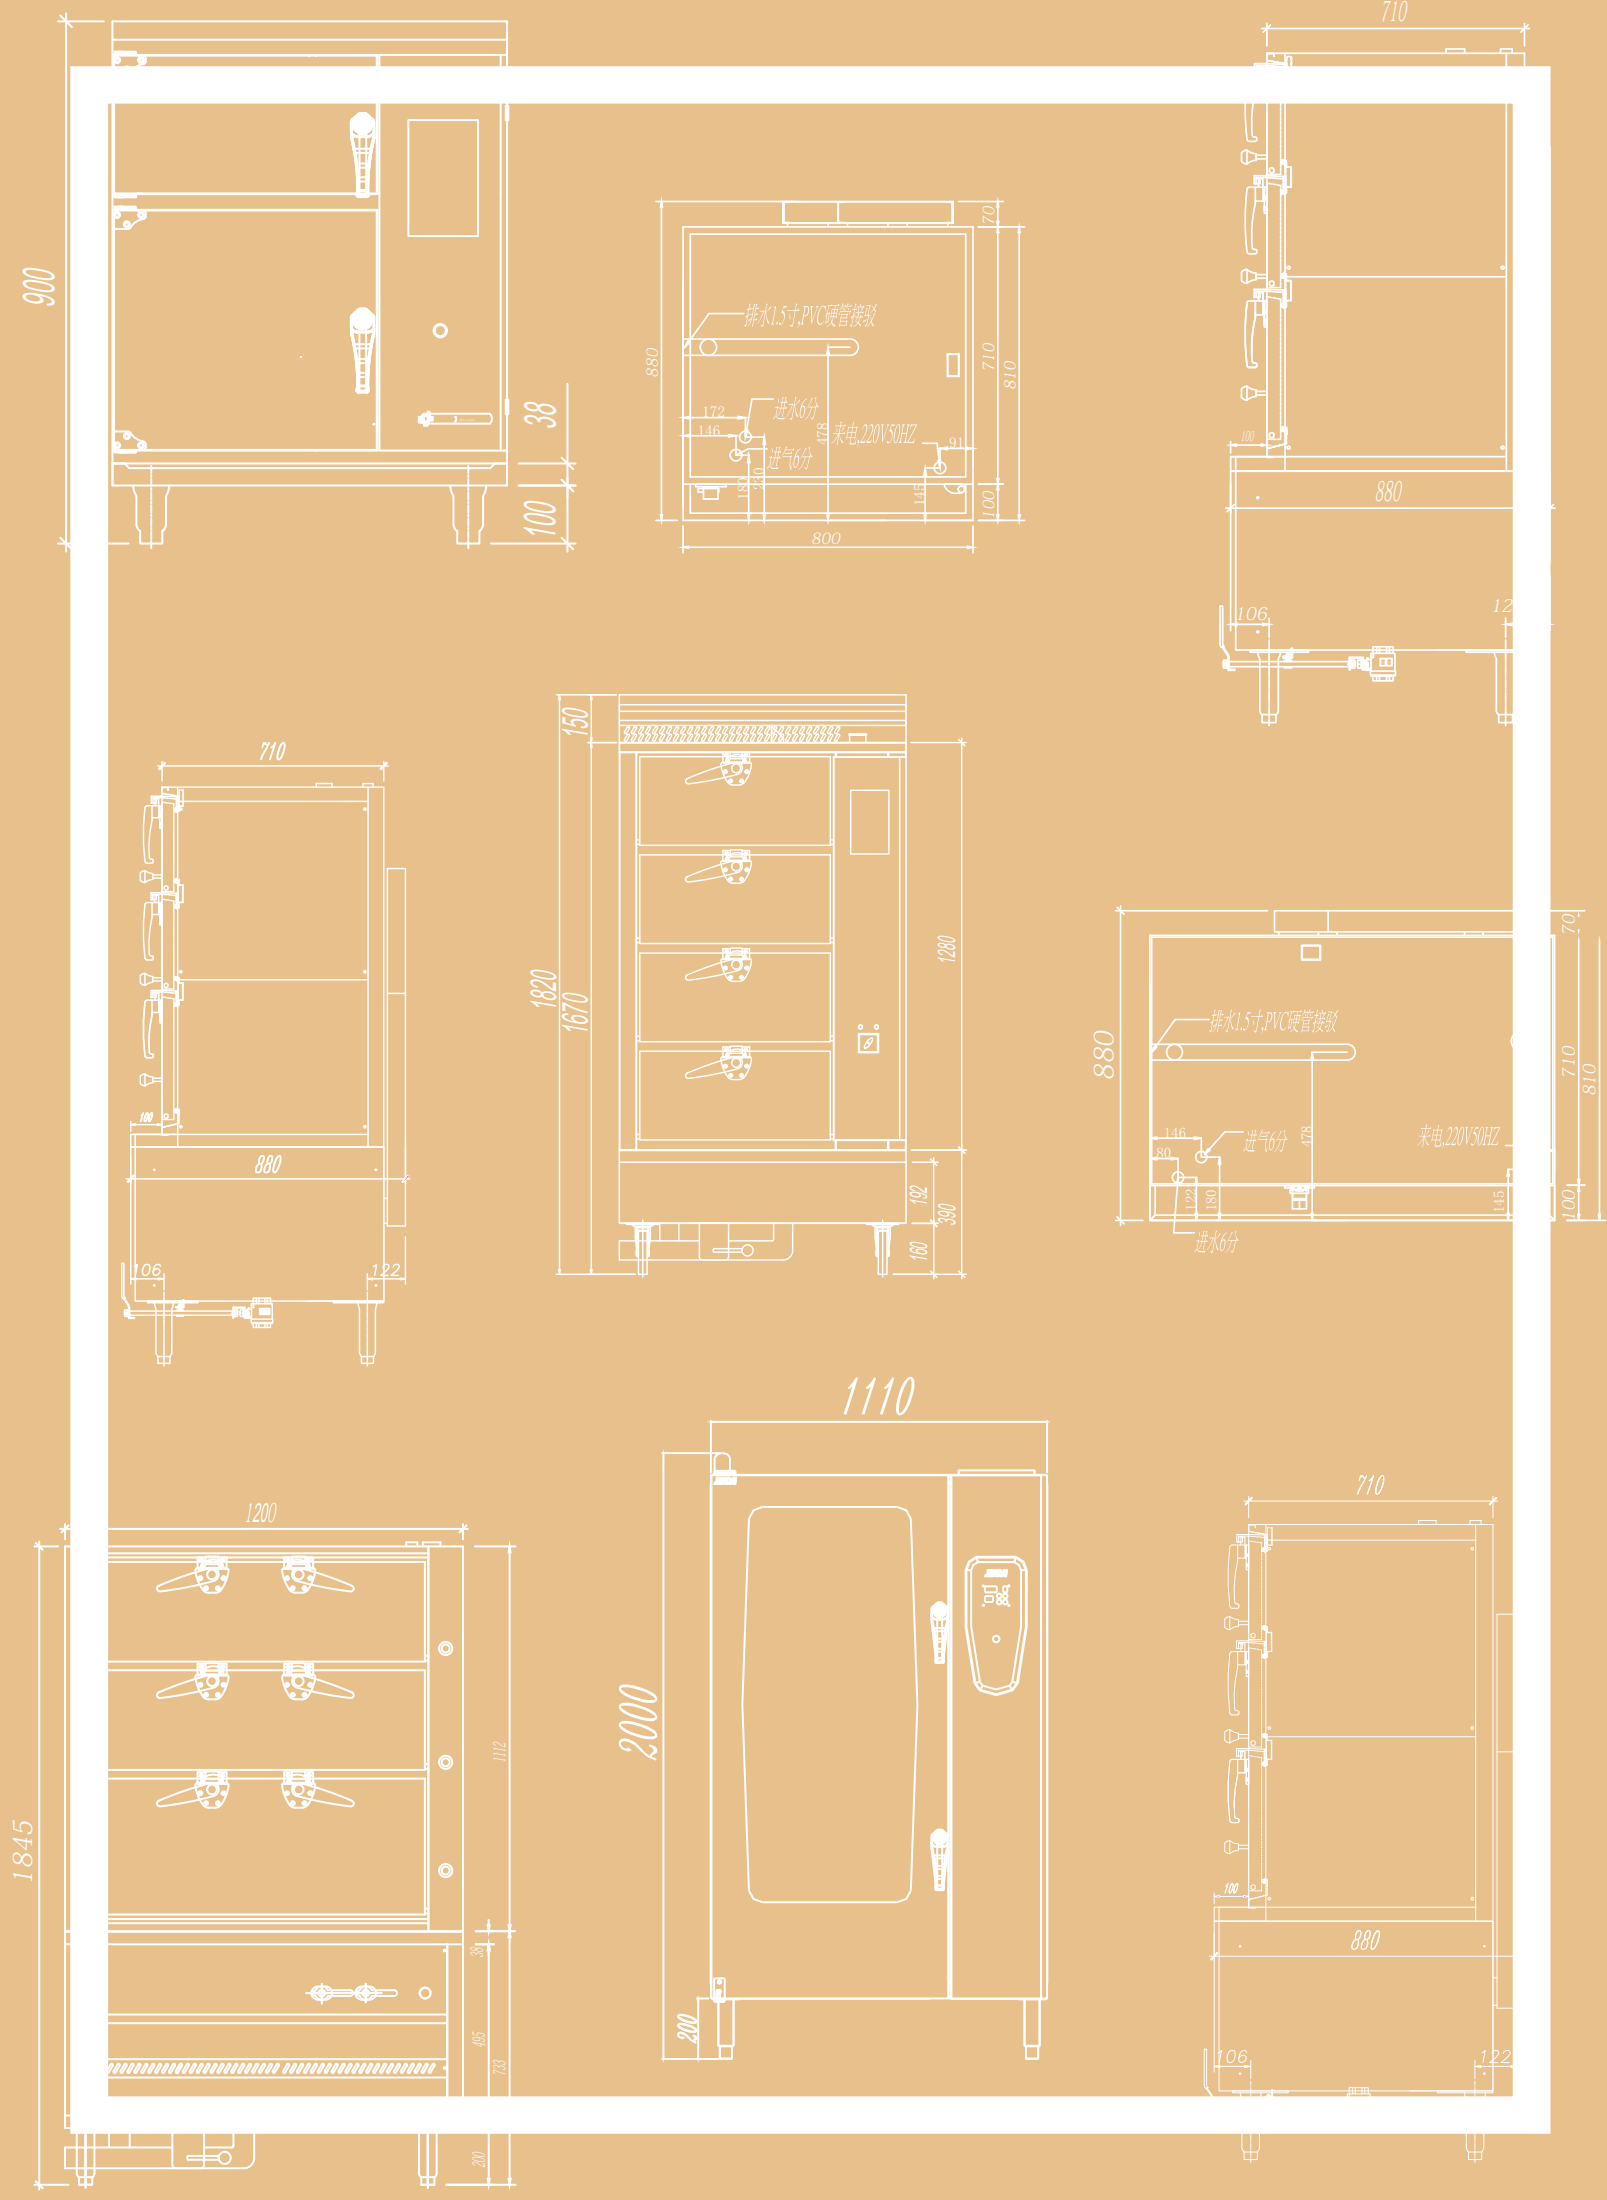

目录
C O N T E N T

15	环保双门电蒸柜 Environmental Cabinet Steamer Double Door
14	环保三门蒸柜 Environmental Cabinet Steamer Three Door
12	环保单门蒸柜 Environmental Cabinet Steamer Single Door
09	智能车载蒸柜 (40盘GN1/1) Smart Roll-in Cabinet Steamer (40no.s GN1/1)
08	平台蒸柜连保温台 Display Counter Top Cabinet Steamer
06	智能六门蒸柜 Six Door Smart Cabinet Steamer
05	智能电大三门蒸柜 Electric Three Door Big Smart Cabinet Steamer
04	智能三门蒸柜 Three Door Smart Cabinet Steamer
02	液晶触控智能蒸柜 (4门) Touch Screen Smart Steam Cabinet (Four Door)
02	液晶触控智能蒸柜 (双门) Touch Screen Smart Steam Cabinet (Double Door)
02	环保大三门蒸柜 Environmental Cabinet Steamer Three Doors
02	环保四门蒸柜 Environmental Cabinet Steamer Four Door

智能
蒸柜



- 不锈钢自然沟风预混喷射炉头
- 燃气款采用隧道式换热面大、耐高温火管的水胆
- 专利设计的蒸箱结构
- 独立圆角内胆-不串味、节能、易清洁
- 离子熄火保护连电子打火系统

- 蒸腔顶部防冷凝水系统
- 防水垢及水垢清除系统
- 余热回收系统（可选）
- 柜胆顶部辅热，没有蒸汽凝露，极大地改善了菜品的品质
- 多重控制，手自一体操作，可靠耐用




- Stainless steel premix injection burner
- Multi contact heat-resistant tunnel heat-exchanger
- Patented design steam box
- Individual rounded corner-tainting-proof,energy-efficient, easy-clean
- Electronic ignition & ions flame-out protection device

- Anti-condensation system at top of steam chamber
- Cleaning and control system of scale deposit on water
- Waste-heat recovery system (Optional)
- Heated tops of the inner cells prevent steam condensation, extraordinary improving the taste
- Multiple controls with manual and automatic control, reliable and stable

液晶触控智能蒸柜（双门）

Touch Screen Smart Steam Cabinet
(Double Door)

型号	SZX24-M2	EZX12-M2
尺寸 (W×D×H)mm	680×800×900	680×700×900
热负荷/电功率	14kW	12kW
来/去水接驳口	φ15mm/φ38mm	φ15mm/φ50mm
电源接驳	/	9kW/380V/3P+N+E/50Hz



排水1.5寸
PVC硬管接驳

进水6分




来电
380V3N50Hz



液晶触控智能蒸柜（4门）

Touch Screen Smart Steam Cabinet
(Four Door)

型号	SZX24-M4B	EZX18-M4B
尺寸 (W×D×H)mm	900×850×1820	900×600×1820
热负荷/电功率	24kW	18kW
来/去水接驳口	φ15mm/φ38mm	φ15mm/φ38mm
电源接驳	/	18kW/380V/3P+N+E/50Hz



排水1.5寸
PVC硬管接驳

进水6分

来电
380V3N50Hz





- ✓ 160度高温跳制，300kpa高压泄压阀
- ✓ 结垢或缺水保护开关及高敏漏电保护开关
- ✓ 余热回收系统（可选）给水胆提供热水
- ✓ 可徒手打开水胆，方便彻底清洗水垢
- ✓ 柜胆顶设有预热除冷凝水功能



可选配件 Optional Accessories

不锈钢GN盆
Stainless steel GN Pan

- 160°C high temperature protection system and 100kpa high pressure protection system
- Water-lacking protection switch, and confection creepage safeguard equipment
- The hot water from waste-heat recovery only be used for the water tank.
- Water tank can be opened by hand, easy for cleaning up limescale
- Equipped with the device that remove the condensation by preheating



智能蒸柜全圆角卫生与方便拆卸挂码内胆



蒸柜方便拆卸挂码



可开蒸柜门徒手打开水箱盖清洗水垢



手自一体双重控制、可靠耐用



智能蒸柜内胆






独立圆角内胆，不串味，节能

智能三门蒸柜 (每层2/1GN盆)

Three Door Smart Cabinet Steamer




型号	SZX42-M3D 🔥🔥	EZX27-M3D ⚡⚡
尺寸 (W×D×H)mm	1050×880×1865	1050×810×1865
热负荷/电功率	42kW	27kW
来/去水接驳口	φ15mm/φ38mm	φ15mm/φ38mm
电源接驳	/	27kW/380V/3P+N+E/50Hz



智能电大三门蒸柜 (每层2/1GN盆)

Electric Three Door Big Smart Cabinet Steamer


型号	SZX42-M3DS 🔥🔥	EZX36-M3DS ⚡⚡
尺寸 (W×D×H)mm	1050×880×1800	1150×880×1850
热负荷/电功率	42kW	36kW
来/去水接驳口	φ15mm/φ38mm	φ15mm/φ38mm
电源接驳	/	380V/3P+N+E/50Hz



智能四门蒸柜 (直向置1/1GN盆)

Four Door Smart Cabinet Steamer


型号	SZX24-M4 	EZX18-M4 
尺寸 (W×D×H)mm	800×800×1730	700×800×1700
热负荷/电功率	24kW	18kW
来/去水接驳口	φ15mm/φ38mm	φ15mm/φ38mm
电源接驳	/	18kW/380V/3P+N+E/50Hz

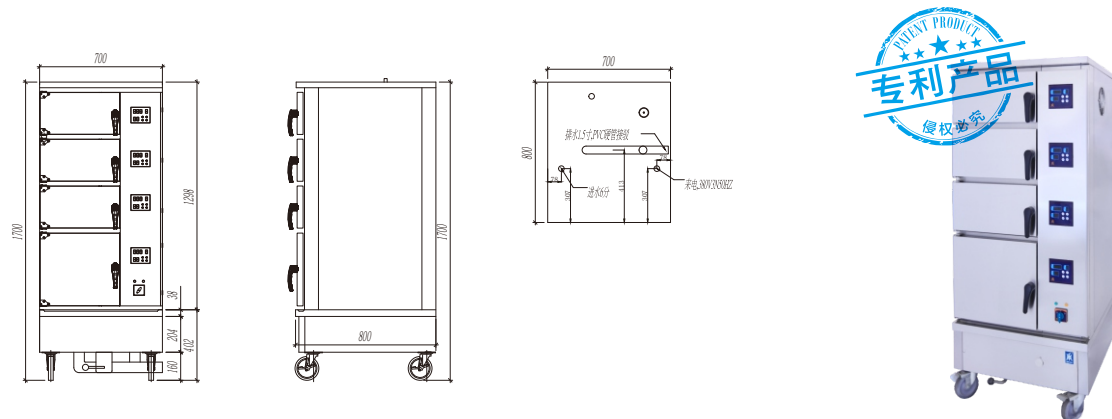

智能四门蒸柜 (横向置1/1GN盆)

Four Door Smart Cabinet Steamer


型号	SZX24-M4B 	EZX18-M4B 
尺寸 (W×D×H)mm	1150×600×1670	900×600×1670
热负荷/电功率	24kW	18kW
来/去水接驳口	φ15mm/φ38mm	φ15mm/φ38mm
电源接驳	/	18kW/380V/3P+N+E/50Hz

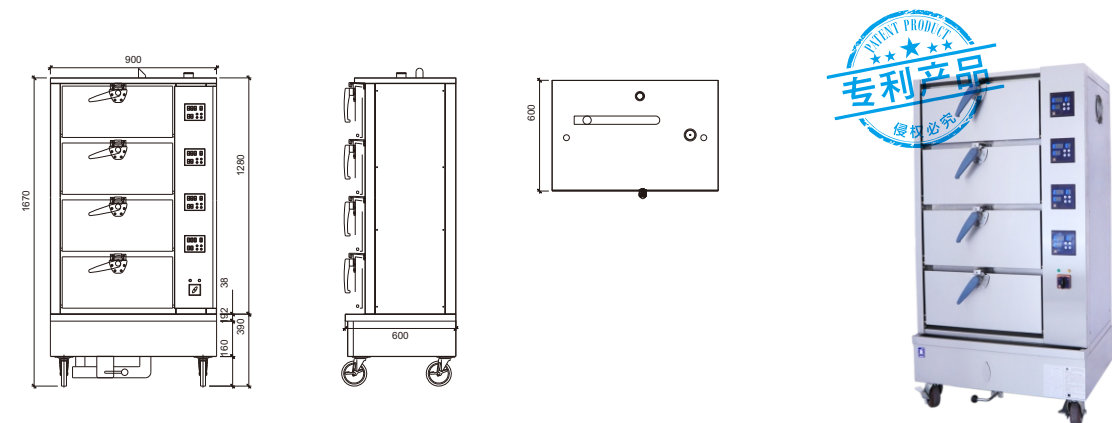

智能六门蒸柜 (直向置1/1GN盆)

Six Door Smart Cabinet Steamer


型号	SZX42-M6 	EZX30-M6 
尺寸 (W×D×H)mm	1250×800×1800	1150×800×1773
热负荷/电功率	42kW	30kW
来/去水接驳口	φ15mm/φ38mm	φ15mm/φ38mm
电源接驳	/	18kW/380V/3P+N+E/50Hz

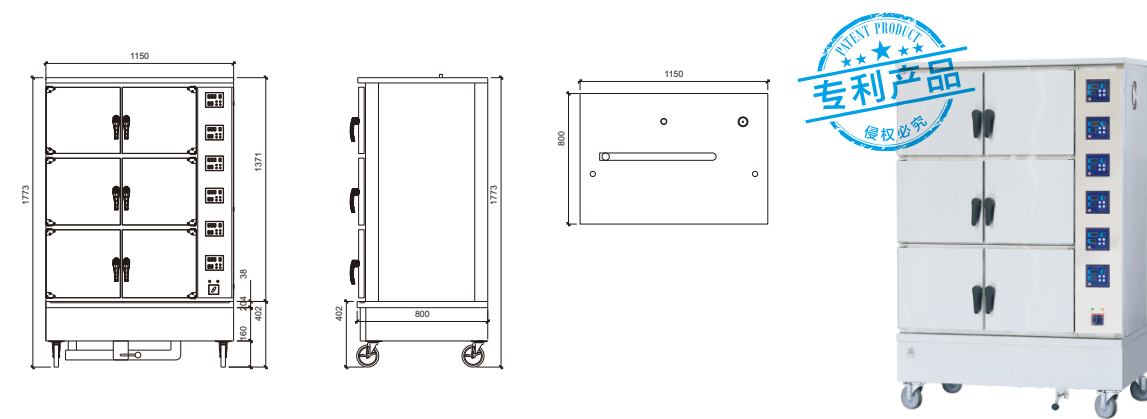

智能八门蒸柜 (直向置1/1GN盆)

Eight Door Smart Cabinet Steamer


型号	SZX42-M8 	EZX30-M8 
尺寸 (W×D×H)mm	1250×800×1730	1150×800×1700
热负荷/电功率	42kW	30kW
来/去水接驳口	φ15mm/φ38mm	φ15mm/φ38mm
电源接驳	/	380V/3P+N+E/50Hz

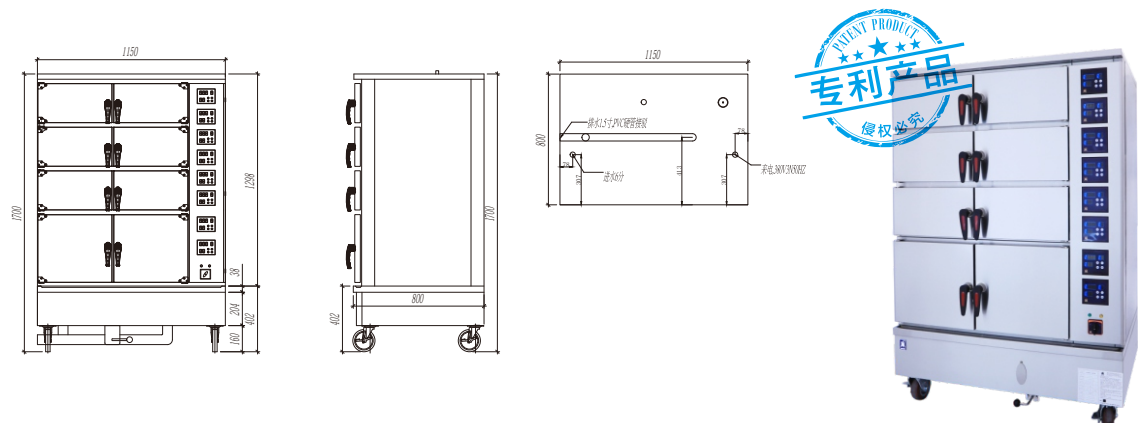

智能八门蒸柜 (横向置1/1GN盆)

Eight Door Smart Cabinet Steamer

型号	SZX42-M8B 🔥🔥	EZX30-M8B ⚡⚡
尺寸 (W×D×H)mm	1700×600×1670	1700×600×1670
热负荷/电功率	42kW	30kW
来/去水接驳口	ϕ15mm/ϕ38mm	ϕ15mm/ϕ38mm
电源接驳	/	380V/3P+N+E/50Hz

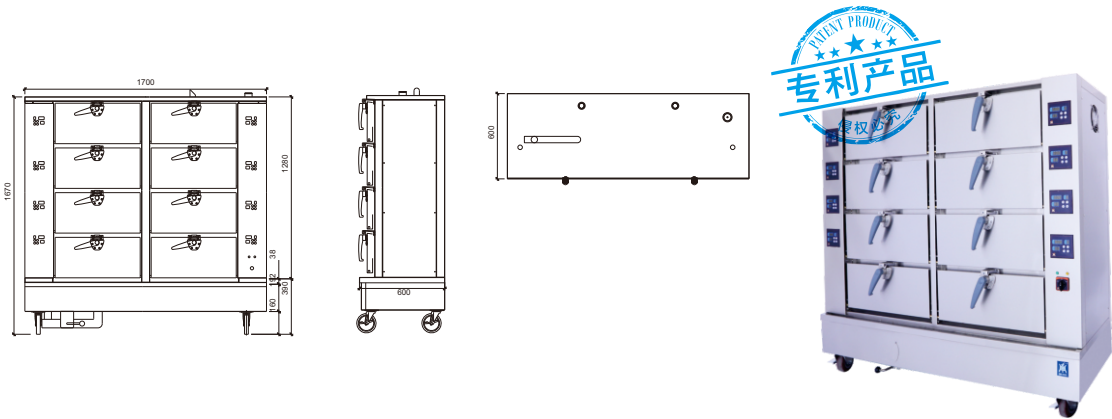

通过将蒸柜柜体设置在保温台面的下方，利用蒸柜柜体烹饪食物时产生的多余水蒸气对保温台面上展示的食物进行保温，无需在后厨进行烹饪和保温，缩短了食物从厨房到餐桌的时间，有利于实现明厨亮灶，将烹饪、保温和展示合三为一，充分利用资源，节省了人力和物力，提高了工作效率，同时节省了空间。




The display counter top utilizes the extra steam from the steamer cabinet below to maintain a good-to-serve temperature and humidity for the food in display. It can efficiently minimize the time from raw to serve. It not only eliminates the cooking and warm keeping in the back kitchen, but also serves as a nice and clean display counter top in the open kitchen. Combining the cooking, warm keeping, and displaying, it can effectively save people and space and increase the efficiency.

平台蒸柜连保温台

Display Counter Top Cabinet Steamer

型号	EZX18-M3B ⚡⚡
尺寸 (W×D×H)mm	1650×800×800
热负荷/电功率	18kW
来/去水接驳口	ϕ15mm/ϕ38mm
电源接驳	380V/3P+N+E/50Hz

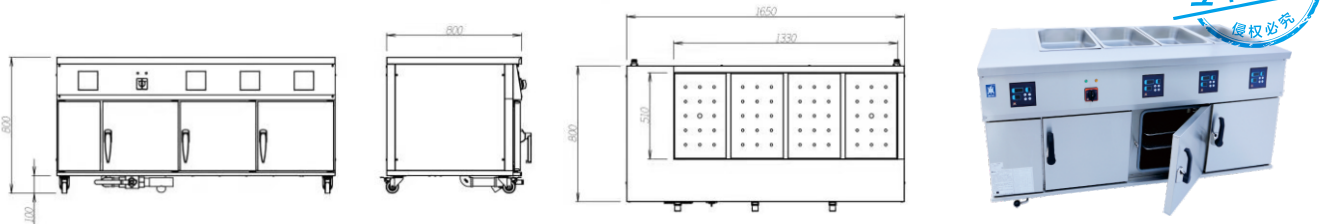

智能 车载 蒸柜



- 微电脑智能双重控制系统
- 耐高温热交换器与余热回收系统
- 一体化设计（无烟窗）
- 蒸汽二次升温系统

- 专门设计的蒸箱结构
- 独立圆角内胆-不串味，节能
- 多重安全保障系统

- Microcomputer dual control system
- Heat-resistant heat-exchanger and waste-heat
- Independent operation and avoid tainting,
- Steam heated by two stage system

- Patented designed fox steam box
- filleted corner in box-inside and no sanitary dead angle
- Multiple safety guarantee system



- ✓ SZX20-SE 配置3条9kW英格莱800#发热管；
- ✓ SZX40-SE 配置4条9kW英格莱800#发热管；
- ✓ 160度高温跳制，100kpa高压泄压阀；
- ✓ 结垢或缺水保护开关及高敏漏电保护开关；
- ✓ 余热回收系统（可选）仅给水胆提供热水；



- Equipped 3no.s 9kW Incoloy 800# heater,
- Equipped 4no.s 9kW Incoloy 800# heater;
- 160℃ high temperature protection system and 100kpa high pressure protection system
- Water-lacking protection switch, and confect
- creepage safeguard equipment
- The hot water from waste-heat recovery only be used for the water tank.

可选配件


Optional Accessories

不锈钢GN1/1盆车及GN盆
Stainless steel GN 1/1 Cart
and GN pan

智能车载蒸柜（40盘GN1/1）

Smart Roll-in Cabinet Steamer
(40no.s GN1/1)

型号	SZX48-P40	🔥	EZX36-P40	⚡
尺寸 (W×D×H)mm	1110×970×2000		1110×970×2000	
热负荷/电功率	48kW		36kW	
来/去水接口	φ15mm/φ38mm		φ15mm/φ38mm	
电源接驳	220V~		380V/3P+N+E/50Hz	

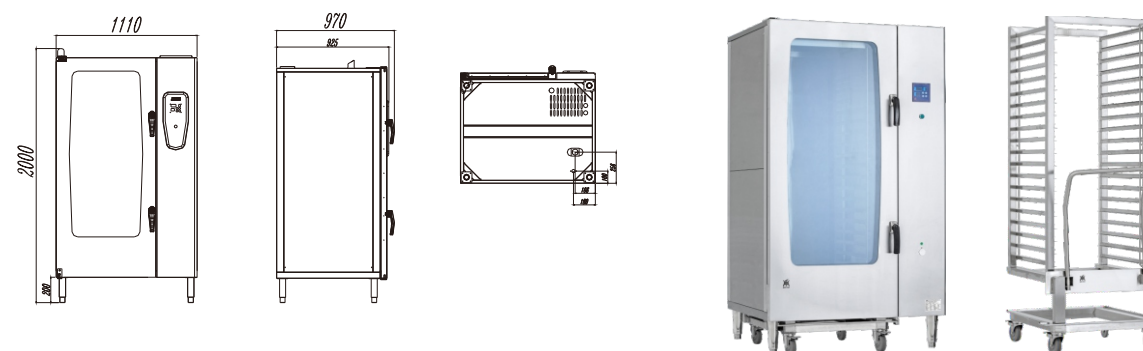

蒸环保 柜保



- 不锈钢自然沟风预混喷射炉头
- 燃气款采用隧道式换热面大、耐高温火管的水胆
- 专利设计的蒸箱结构
- 独立圆角内胆-不串味、节能、易清洁
- 离子熄火保护连电子打火系统

- 蒸腔顶部防冷凝水系统
- 防水垢及水垢清除系统
- 余热回收系统（可选）
- 柜胆顶部辅热，没有蒸汽凝露，极大地改善了菜品的品质
- 多重控制，手自一体双重控制，可靠耐用


- Stainless steel premix injection burner
- Multi contact heat-resistant tunnel heat-exchanger
- Patented design steam box
- Individual rounded corner-tainting-proof,energy-efficient, easy-clean
- Electronic ignition & ions flame-out protection device

- Anti-condensation system at top of steam chamber
- Cleaning and control system of scale deposit on water
- Waste-heat recovery system (Optional)
- Heated tops of the inner cells prevent steam condensation, extraordinary improving the taste
- Multiple controls with manual and automatic control, reliable and stable

环保单门蒸柜

Environmental Cabinet Steamer Single Door


型号	SZX42-M1 🔥🔥
尺寸 (W×D×H)mm	800×880×1865
热负荷/电功率	42kW
来/去水接驳口	φ15mm/φ38mm
电源接驳	/

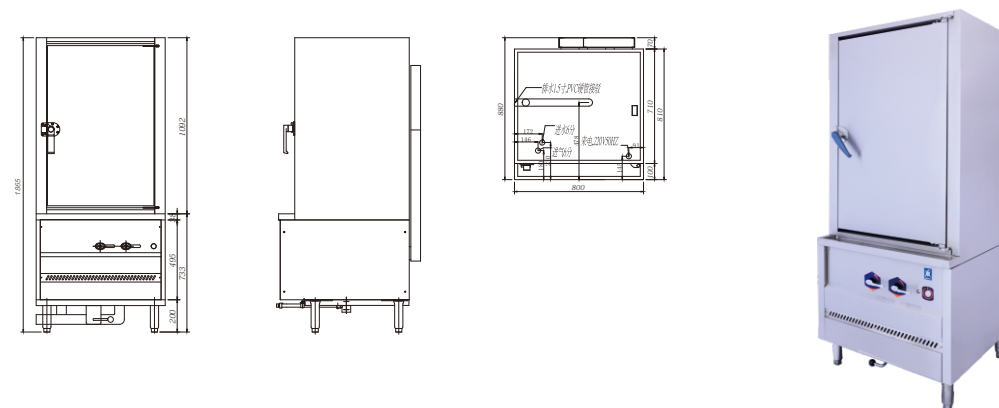

环保单门蒸柜

Environmental Cabinet Steamer Single Door

型号	EZX27-M1 ⚡⚡
尺寸 (W×D×H)mm	700×900×1865
热负荷/电功率	27kW
来/去水接驳口	φ15mm/φ38mm
电源接驳	27kW/380V/3P+N+E/50Hz

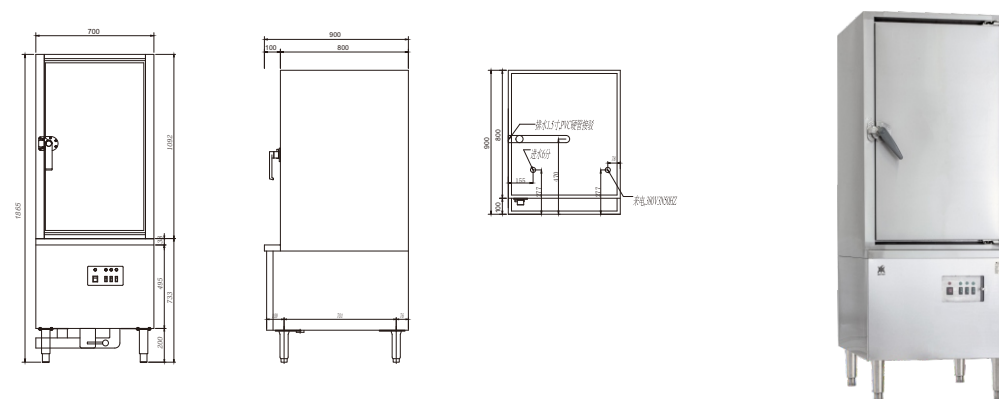



- ✓ 配置3个14kW不锈钢预混
- ✓ 自然沟风喷射炉头
- ✓ 运行噪音可低于60dB
- ✓ Co排放量少于 0.01%
- ✓ 能源节约30%左右
- ✓ 熄火安全时间小于2秒



- Equipped 3no.s 14kW S/S Premix injection burner
- The operation noise is below 60dB
- Co emissions volume is less than 0.01%
- Energy saving is about 30% lower than normal
- Ions flame-out protection device will cut off the gas
- supply within 2 seconds

可选配件
Optional Accessories
不锈钢层网,400x600蒸盆
Stainless steel shelving
400x600 GN pan



可开蒸柜门，徒手打开水箱盖清洗水垢



全圆角内胆，不藏污垢，
清洁方便卫生



蒸柜方便拆卸挂码



智能蒸柜门及把手



三门蒸柜圆支挂码卫生与
拆卸方便






胆顶不结冷凝水

对开门蒸柜

Cabinet Steamer Double Door




型号	SZX56-M2 🔥🔥	EZX36-M2 ⚡⚡
尺寸 (W×D×H)mm	1150 × 880 × 1865	1150 × 810 × 1865
热负荷/电功率	56kW	36kW
来/去水接驳口	φ15mm/φ38mm	φ15mm/φ38mm
电源接驳	/	18kW/380V/3P+N+E/50Hz



环保三门蒸柜

Environmental Cabinet Steamer Three Door


型号	SZX42-M3 🔥🔥	EZX27-M3 ⚡⚡		
尺寸 (W×D×H)mm	900 × 880 × 1865	900 × 810 × 1865	炉前压力	
热负荷/电功率	42kW	27kW	天然气	2000pa
来/去水接驳口	φ15mm/φ38mm	φ15mm/φ38mm	石油气	2800pa
电源接驳	0.01kW/220V/1Ph/50Hz	380V3N~	煤气	1200pa
燃气接驳	DN20	/		



环保大三门蒸柜

Environmental Cabinet Steamer Three Door

型号	SZX56-M3D	EZX36-M3D	
尺寸 (W×D×H)mm	1200×880×1865	1200×810×1865	炉前压力
热负荷/电功率	56kW	36kW	天然气 2000pa
来/去水接驳口	φ15mm/φ38mm	φ15mm/φ38mm	石油气 2800pa
电源接驳	0.01kW/220V/1Ph/50Hz	380V3N~	煤气 1200pa
燃气接驳	DN20	/	

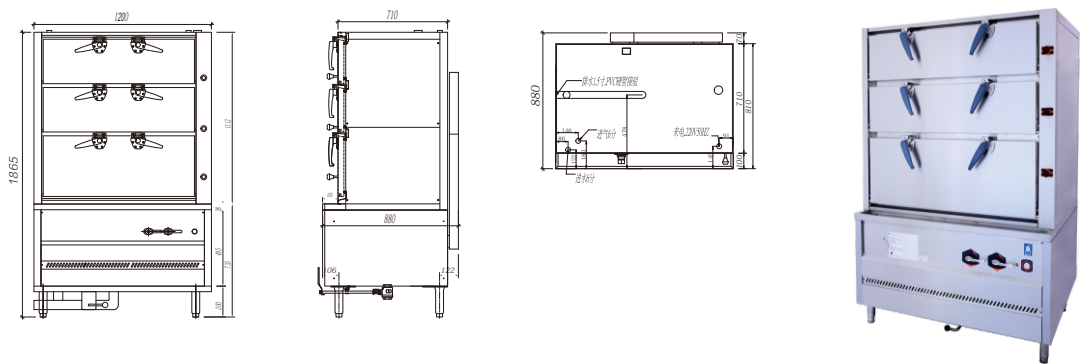

环保四门蒸柜

Environmental Cabinet Steamer Four Door

型号	SZX56-M4	EZX36-M4D	
尺寸 (W×D×H)mm	900×880×1850	900×810×1850	炉前压力
热负荷/电功率	56kW	36kW	天然气 2000pa
来/去水接驳口	φ15mm/φ38mm	φ15mm/φ38mm	石油气 2800pa
电源接驳	0.01kW/220V/1Ph/50Hz	380V3N~	煤气 1200pa
燃气接驳	DN20	/	

