

精工细作，
问鼎厨界！



深圳鼎华厨房电器有限公司
SHENZHEN DINGHUA KITCHEN EQUIPMENT CO.,LTD

Chinese^{style}Stove

深圳鼎华厨房电器有限公司

SHENZHEN DINGHUA KITCHEN EQUIPMENT CO.,LTD

深圳市龙华区福城街道栖坑社区观澜大道100号芷峪澜湾花园F座6G

14A3H, Building A, Zhujiang Plaza, Longcheng Street,

Longgang District, Shenzhen


电话: 139 2282 9027

邮箱: 422726815@qq.com

网址: www.dinhua.com /www.dinhua.cn

热线电话: 400-806-8288



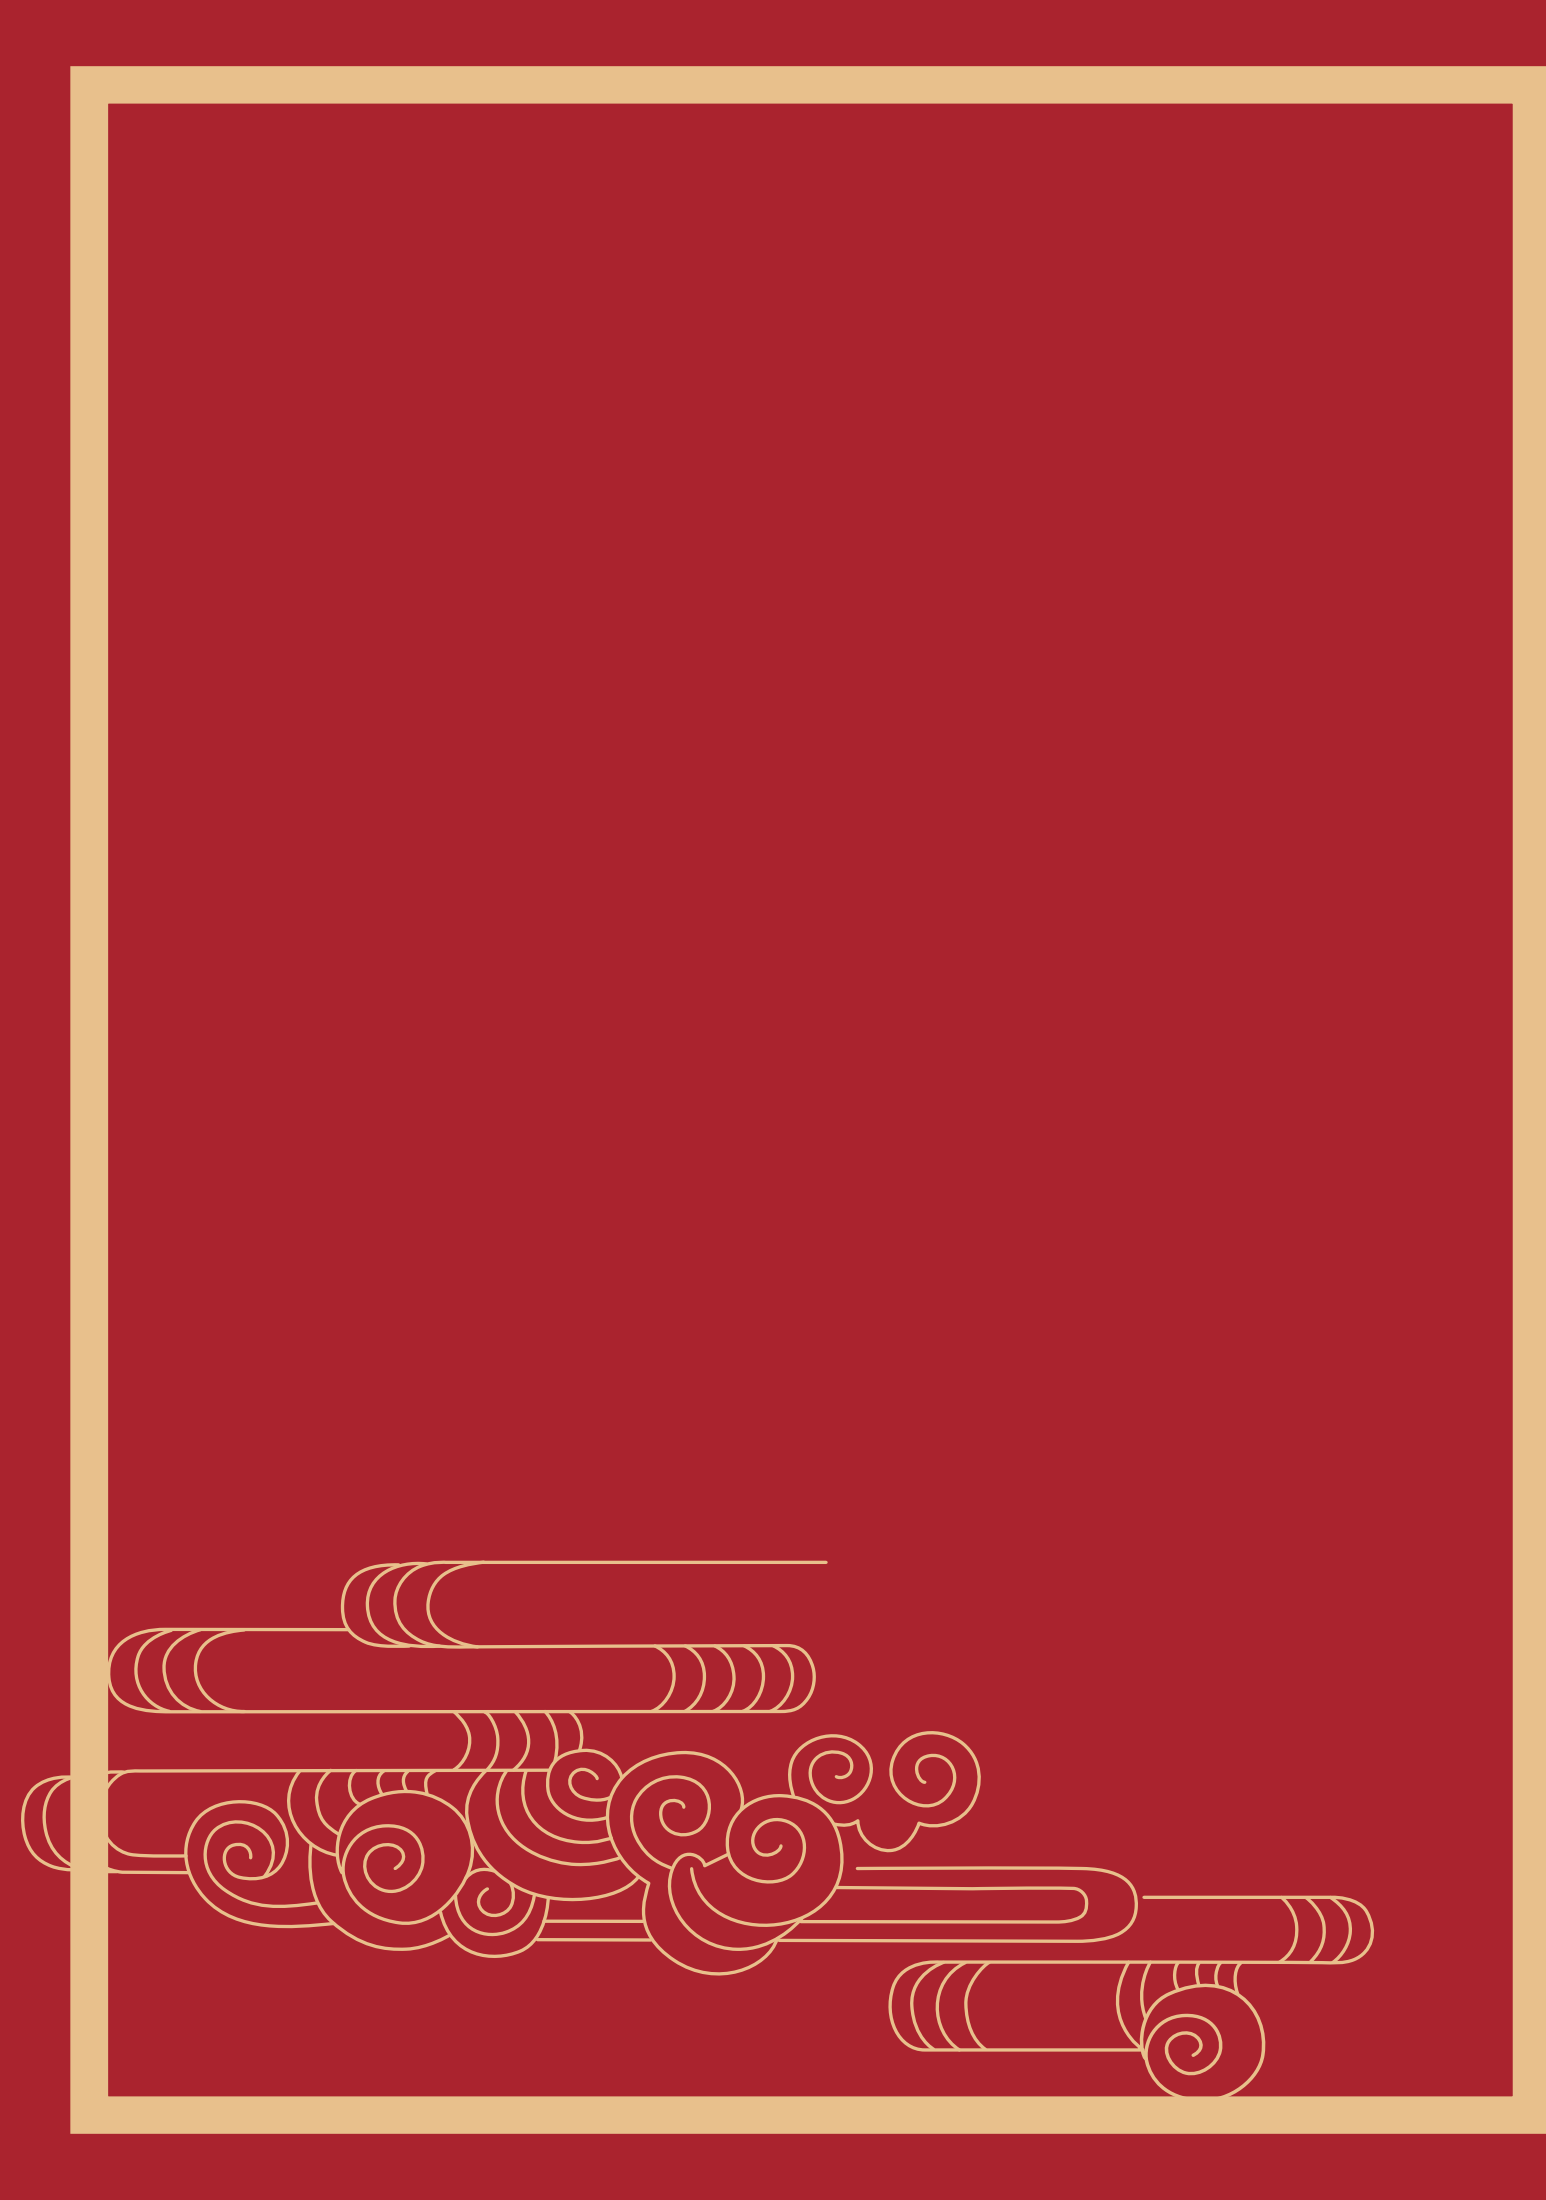

目录
C O N T E N T

01 04	环保炒炉 Environmental Cooking Range
05 08	蒸炉 / 肠粉炉 Steamer Series
09 10	燃气矮汤炉 Gas Stock Pot Stove
11 12	煲仔炉 Gas Boiling Table
13 14	烧烤炉 Roaste Series
15 19	电磁炉 Induction Cooking Range

环保炒炉



- 耐高温S/S预混炉头
- 柔性风气联动系统
- 离子熄火保护系统连电子打火
- 静音工频风机


- Heat-resistant premix S/S burner
- Flexibility gas-wind linkage system
- Electronic ignition & ions flame failure device
- Mute power frequency fan

- 全整体炉砖隔热保温系统
- 全不锈钢框架结构等特种工艺
- 余热回收系统（可选）
- 定制搪瓷生铁圈，经久耐用

- Modular Stove-brick heat insulating system
- Entire stainless steel structure and special crafts
- Waste-heat recovery system (Optional)
- Customized enamel-coated cast-iron ring, strong and durable


粤式燃气环保单头单尾炒炉 Guangdong Style Environmental Cooking Range
-Single Burner with rear pot

型号	SZC42-DH	
尺寸 (W×D×H)mm	1200×1250×(810+440)	炉前压力
热负荷	42kW	天然气 2000pa
来/去水接驳口	φ15mm/φ48mm	石油气 2800pa
电源接驳	0.15kW/220V/1Ph/50Hz	煤气 1200pa
燃气接驳	Dn20	

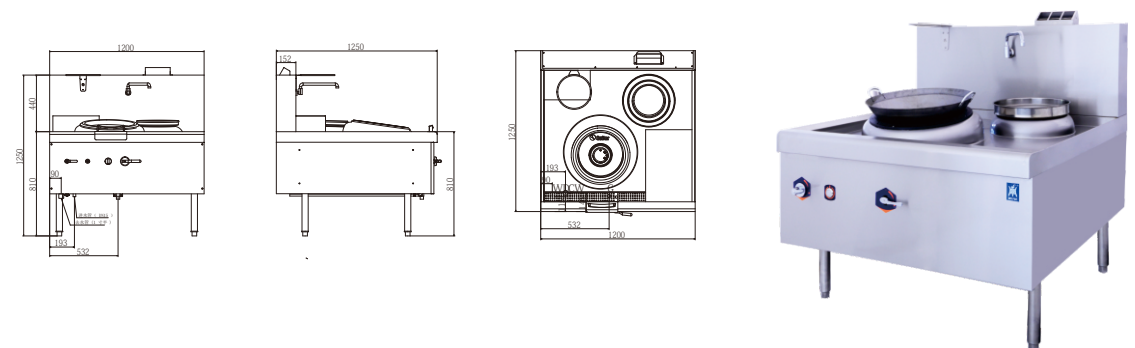

粤式燃气环保双头双尾炒炉 Guangdong Style Environmental Cooking Range
-Dual Burner with rear pots

型号	SZC42/84-DH	
尺寸 (W×D×H)mm	2200×1250×(810+440)	炉前压力
热负荷	42kW×2	天然气 2000pa
来/去水接驳口	φ15mm/φ48mm	石油气 2800pa
电源接驳	0.30kW/220V/1Ph/50Hz	煤气 1200pa
燃气接驳	DN20×2	

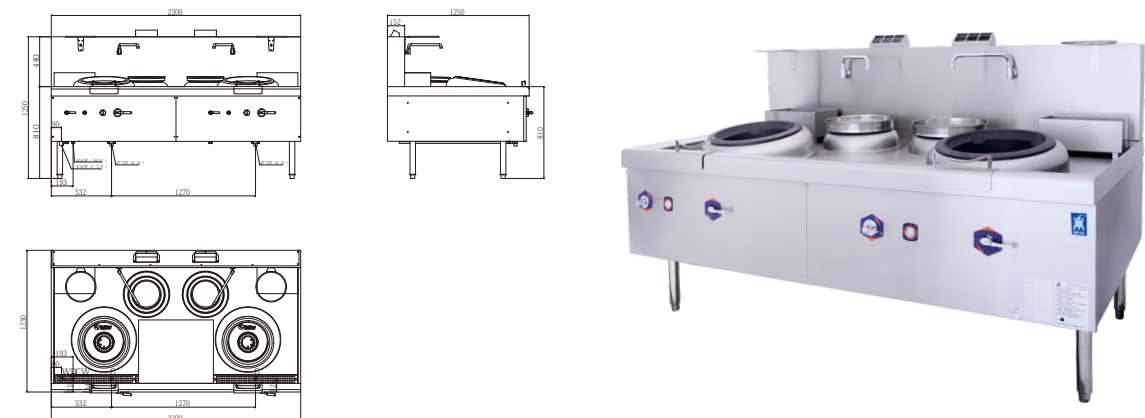

Feature

产品优点



不锈钢框架、管路简便
燃气炒炉



蒸炉炒炉一体无缝台面

可选配件 Optional Accessories

调味板 Condiment Board
水盆 Water pan
炸茜架 Sieve holder
炉架 Cast iron ring

- ✓ 配置 5" 耐高温不锈钢炉头
- ✓ 运行噪音可低于65dB
- ✓ co排放量少于 0.01%
- ✓ 能源节约30%左右
- ✓ 熄火安全时间小于2秒
- ✓ 全不锈钢框架铆装结构，不变形、稳固




- Equipped with 5" heat-resistant premix S/S burner
- The operation noise is below 65dB
- CO emissions volume is less than 0.01%
- Energy saving is about 30% lower than normal
- Ions flame-out protection device will cut off the gas supply within 2 seconds
- Entire stainless steel riveted structure, stable and non-deformation



一体炉砖、环保炉头




燃气环保单头大炒炉 Gas Environmental Single Big Cooking Range

型号	SDGT48-DH	
尺寸 (W×D×H)mm	1200×1250×(810+440)	炉前压力
热负荷	48kW	天然气 2000pa
来/去水接驳口	φ15mm/φ48mm	石油气 2800pa
电源接驳	0.15kW/220V/1Ph/50Hz	煤气 1200pa
燃气接驳	DN20	



燃气环保双头大炒炉 Gas Environmental Dual Big Cooking Range

型号	SDGT48/96-DH	
尺寸 (W×D×H)mm	2200×1250×(810+440)	炉前压力
热负荷	2×48kW	天然气 2000pa
来/去水接驳口	φ15mm/φ48mm	石油气 2800pa
电源接驳	0.30kW/220V/1Ph/50Hz	煤气 1200pa
燃气接驳	DN20×2	



Steamer Series

蒸炉 肠粉炉



- 燃气款采用创新螺旋火管技术,增大受热面积,热效率提升30%
- 全新隔热设计,减少热量损失
- 一键式开关,自动点火和熄火装置,安全快捷去水装置及时清理水垢


- Innovation spiral fire tube technology, increase the heating surface, thermal efficiency is increased by 30%
- New heat insulation design, reducing the heat loss
- One click switch, automatic ignition and cut-off device, safety and convenient, cleaning lime scale valve in time

- 800#加热装置, 高效节能, 经久耐用
- 电热款电子全自动控制
- 手动除水垢装置, 卫生耐用

- Incoloy800# heating device, high efficiency and energy saving
- LED digital control panel, time and temperature can be displayed visually, multiple program automatic control
- Manual descaling device, health and durable


环保蒸炉 Environmental Steamer

型号	SZX48-S2	EZX36-S2
尺寸 (W×D×H)mm	1500x1050x810	1500x1050x810
热负荷	48kW	36kW
来/去水接驳口	¢15mm/?38mm	¢15mm/¢38mm
电源接驳	100W/220V/1Ph/50Hz	380V3N~
燃气接驳	¢19mm	¢19mm

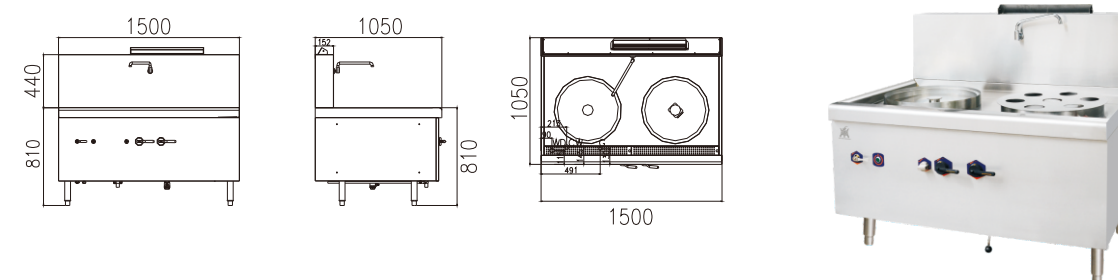

双头肠粉炉 Dual Roll Rice Steamer

型号	SZX48-C2	EZX36-SC2
尺寸 (W×D×H)mm	1500x1050x810	1500x1050x810
热负荷	48kW	36kW
来/去水接驳口	¢15mm/?38mm	¢15mm/?38mm
电源接驳	0.01kW/220V/1Ph/50Hz	380V3N~
燃气接驳	¢19mm	¢19mm

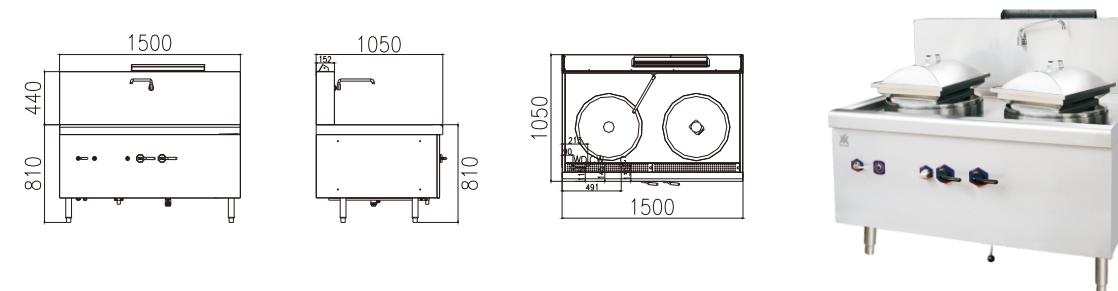

Feature

产品优点



可选配件 Optional Accessories

- 肠粉隔
7星板
蒸笼(Ø540)
- Rice Roll box
S/S pan
S/S food steamer
(Ø540)

- ☑ 配置3个14kW不锈钢自然沟风预混喷射炉头;
- ☑ 运行噪音可低于60dB;
- ☑ Co排放量少于 0.01%;
- ☑ 能源节约30%左右;
- ☑ 熄火安全时间小于2秒;


- Equipped 3no.s 14kW S/S Premixed mixing burner;
- The operation noise is below 60dB;
- CO emissions volume is less than 0.01%;
- Energy saving is about 30% lower than normal;
- Ions flame-out protection device will cut off the gas supply within 2 seconds.

- ☑ 配置3条9kW英格莱800#发热管
- ☑ 160度高温跳制, 100kpa高压泄压阀
- ☑ 余热回收系统(可选)仅给水胆提供热水
- ☑ 可徒手打开水胆, 清洗水垢
- ☑ 柜胆设有预热除冷凝水功能

- Equipped 3no.s 9kW Incoloy 800# heater;
- 160°C high temperature protection system and 100kpa high pressure protection system
- Water-lacking protection switch, and confect creepage safeguard equipment
- The hot water from waste-heat recovery only be used for the water tank.


单头蒸炉 Single Steamer

型号	SZX42-S1	EZX27-S1
尺寸 (W×D×H)mm	900x1050x810	900x1050x810
热负荷	42kW	27kW
来/去水接驳口	¢15mm/¢38mm	¢15mm/¢38mm
电源接驳	100W/220V/1Ph/50Hz	380V3N~

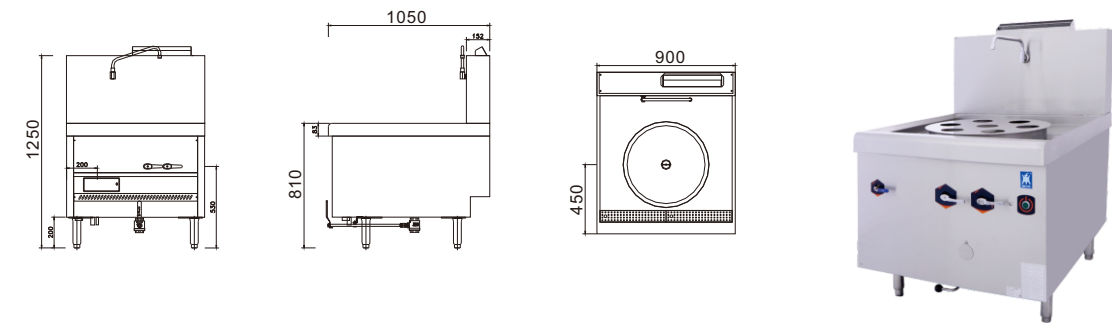

单头肠粉炉 Gas Environmental Dual Big Cooking Range

型号	SZX42-C1	SZX27-C1
尺寸 (W×D×H)mm	800x1050x810	800x1050x810
热负荷	42kW	27kW
来/去水接驳口	¢15mm/¢38mm	¢15mm/¢38mm
电源接驳	100kW/220V/1Ph/50Hz	380V3N~
燃气接驳	¢19mm	¢19mm

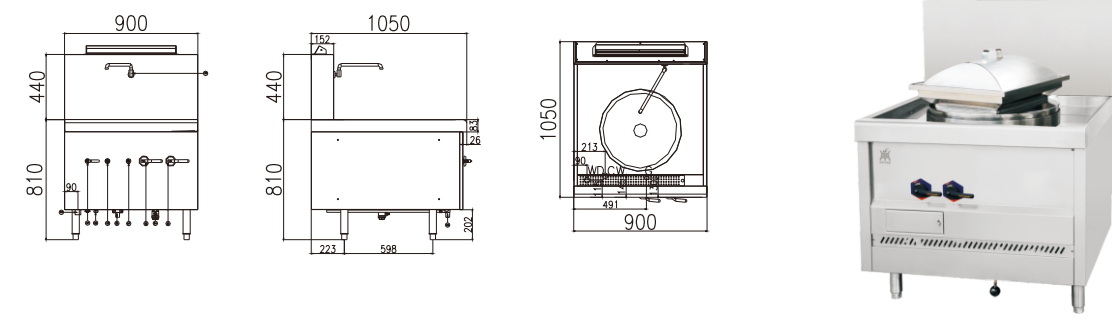


燃气矮汤炉




燃气单头矮汤炉 Gas Stock Single Pot Stove

型号	SPT14-DH(单圈)	SPT24-DH(双圈)
尺寸 (W×D×H)mm	550×650×(500+200)	600×750×(500+200)
热负荷	14kW	24kW
燃气接驳	DN20	DN20
配置炉头	8"强力炉头	14"强力炉头

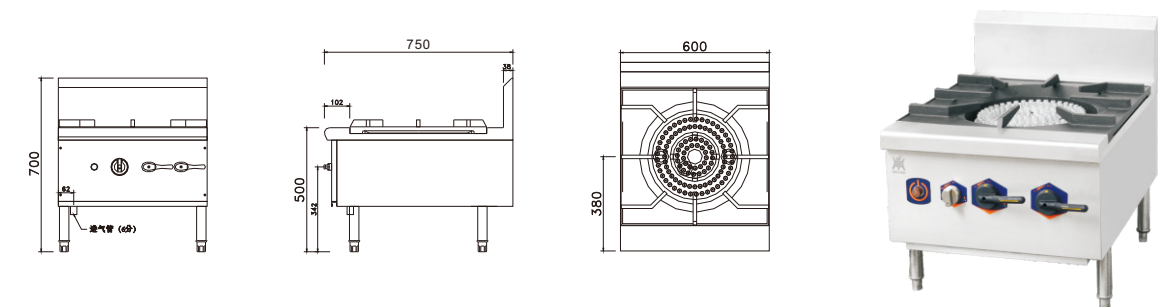

燃气双头矮汤炉 Gas Stock Dual Pot Stove

型号	SPT14/28-DH(单圈)	SPT24/48-DH(双圈)
尺寸 (W×D×H)mm	1100×650×(500+200)	1200×750×(500+200)
热负荷	14kWx2	24kWx2
燃气接驳	DN20	DN20
配置炉头	8"强力炉头	14"强力炉头

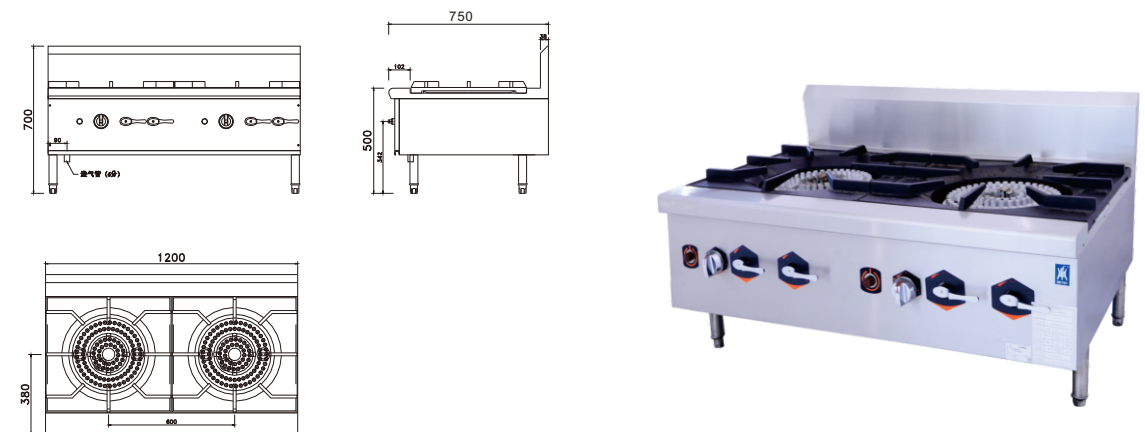

- 高效静音自然清风铸铝炉头，高效节能
- 设有热电偶熄火保护，安全可靠
- 设有易清洁接渣盆
- 特别定制搪瓷炉花板，经久耐用、不变色

- 运行噪音可低于60dB
- CO排放量少于0.01%
- 熄火安全时间小于2秒

- Silent cast aluminum burner, energy saving
- Equipped thermocouple flame failure protection device
- Equipped drip pan in order to clean easily
- Enamel plated cast iron grate, durable and fadeless

- The operation noise is below 60dB
- CO emissions volume is less than 0.01%
- Ions flame-out protection device will cut off the gas supply within 2 seconds.

Gas Boiling Table

煲仔炉



- 高效静音自然清风铸铝炉头，高效节能
- 设有热电偶熄火保护，安全可靠
- 有易清洁接渣盆
- 特别定制搪瓷炉花板，经久耐用、不变色

- Silent cast aluminum burner, energy saving
- Equipped thermocouple flame failure protection device
- Equipped drip pan in order to clean easily
- Enamel plated cast iron grate, durable and fadeless




- 配置6"或7"文华炉头
- 运行噪音可低于60dB
- CO排放量少于0.01%
- 熄火安全时间小

- Equipped 6" or 7" Mind burner
- The operation noise is below 60dB
- CO emissions volume is less than 0.01%
- Ions flame-out protection device will cut off the gas supply in little time

燃气四头煲仔炉(文华炉头)

Gas 4 burner Boiling Table
(Mild Burner)




型号	SPT5/20-DH(单圈)	SPT7/28-DH(双圈)
尺寸 (W×D×H)mm	900x760x(810+150)	800x900x(810+150)
热负荷	20kW	28kW
燃气接驳	¢19mm	¢19mm



燃气六头煲仔炉(文华炉头)


Gas 6 burner Boiling Table
(Mild Burner)

型号	SPT5/30-DH(单圈)	SPT7/42-DH(双圈)
尺寸 (W×D×H)mm	900x760x(810+150)H	1200x900x(810+15)H
热负荷	30kW	42kW
燃气接驳	¢19mm	¢19mm



Rost Series

烧烤炉

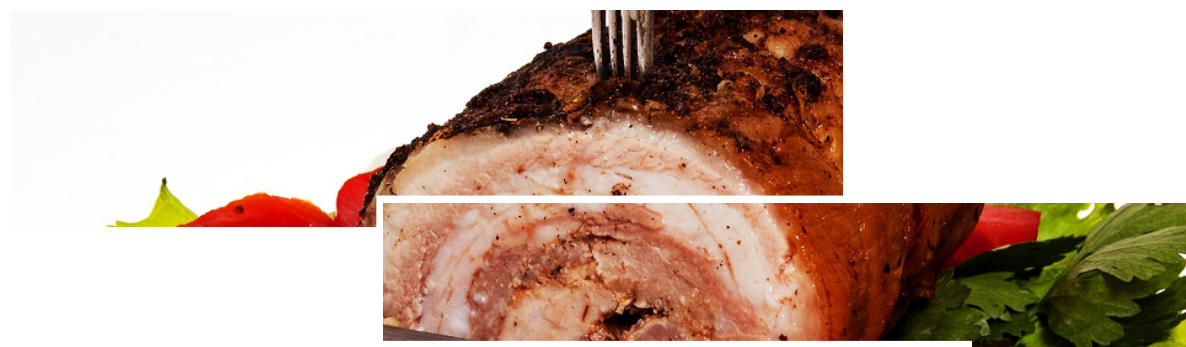


- 铸铁自然沟风预混炉头，高效节能
- 设有热电偶熄火保护，安全可靠
- 设有可拖出易清洁接渣盆，卫生美观
- 特别定制搪瓷炉花板，经久耐用，不变色

- Silent cast aluminum ring , energe saving
- Equipped thermocouple flame failure protection device
- Equipped drip pan in order to clean easily
- Enamel plated cast iron grate, durable and fadeless


烤猪炉 Pig Roaster

型号	SSK50-Z
尺寸 (W×D×H)mm	620x1100x600
热负荷	50kW
来气管	3/4"

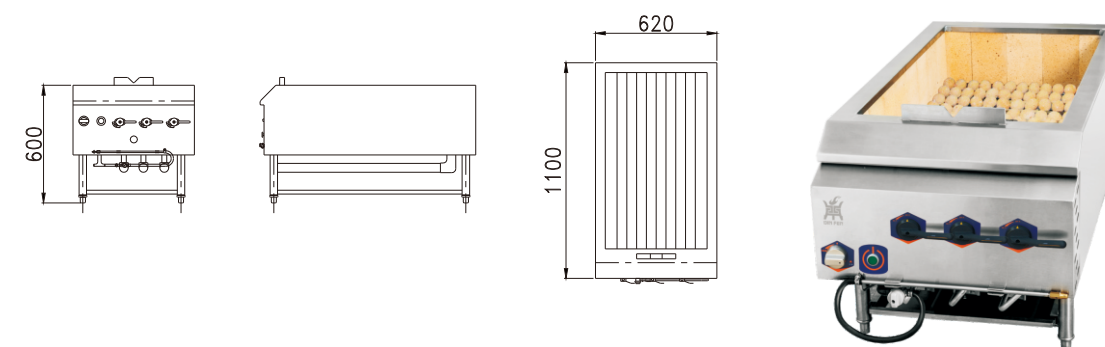

烤鸭炉 Duck Roaster

型号	SKX16-YD32	SKX16-YD36	SKX16-YD39
尺寸 (W×D×H)mm	ø800x1500	ø900x1550	ø1000x1600
热负荷	16kW	16kW	16kW
来/去水接驳口	¢15mm/¢38mm	¢15mm/¢38mm	¢15mm/¢38mm

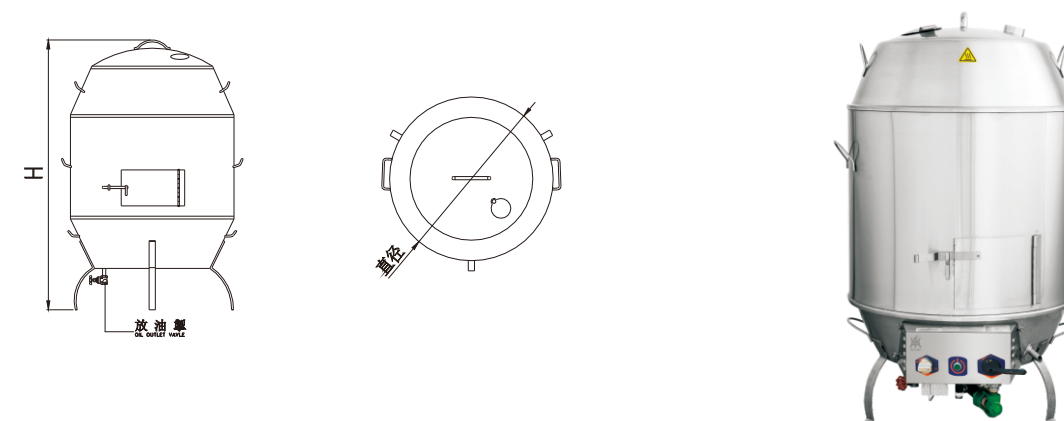

Induction Cooking Range

电磁炉



- **节能:** 电磁热效率在98%以上, 燃油、燃气的热效率在20%–55% ;
- **高效:** 加热速度快, 温度可控! 电磁炉采用了最先进的电磁加热技术, 火力够猛、够旺, 温度高时, 锅内会起火, 炒出的菜肴锅气十足, 毫不逊色! (温升速度快, 15秒温升300度)
- **舒适:** 人性化设计, 操作方便, 火力把手调节开关轻松方便。煎、炒、炸、煮、炖样样神通, 产品使用简单方便。


- **Energy saving:** the electromagnetic thermal efficiency is over 98%, and the thermal efficiency of fuel and gas is between 20% and 55%.
- **High efficiency:** fast heating speed and controllable temperature! Induction wok range adopts the most advanced electromagnetic heating technology. Firepower is fierce enough and at high temperature, the wok will be on fire. It is as good as gas range. (The temperature rises up to 300 degrees within 15 seconds)
- **Comfort:** humanized design, easy operation, firepower adjustment switch. Fried, stir-fried, deep fried, boiled, stewed, all kinds of cooking ways are available.

- **安全:** 由于电磁炉线圈和锅体没有直接接触, 而是靠电磁感应加热, 所有没有漏电危险。电磁炉发热线圈本身有磁条陈列, 和锅体对磁力线的汇聚吸收作用, 并且经过金属外壳屏蔽所有不会对人体造成伤害。
- **环保:** 无燃烧废气, 无燃烧烟尘排放, 无噪音, 无热能排放。保证了厨房的清洁, 保护环境。
-

- **Safety:** since the coil of the induction cooker is not in direct contact with the wok body, it is heated by electromagnetic induction, so there is no risk of electric leakage. The heating coil of the induction cooker itself has the display of magnetic strips and it has also the aggregation and absorption of magnetic lines by the wok body, which is shielded by the metal shell.
- **Environmental protection:** no burning waste gas, no burning smoke emissions, no noise, no heat emissions. Keep the kitchen clean and protect the environment.


单头单尾电磁炒炉 Single Induction Wok Range

型号	EZ15-DC
尺寸 (W×D×H)mm	1200×1050×(810+440)
热负荷	(15+1) kW
来/去水接驳口	φ15mm/φ38mm
电源接驳	380V3N~

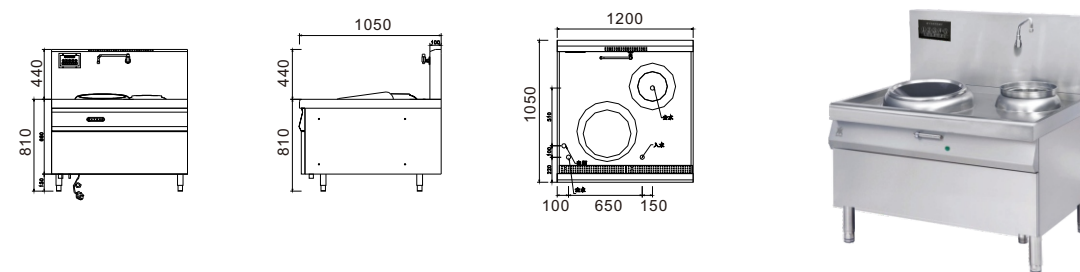

双头双尾电磁炒炉 Dual Induction Wok Range

型号	EZC15/30-DC
尺寸 (W×D×H)mm	2200×1050×(810+440)
热负荷	(15+2) kWx2
来/去水接驳口	φ15mm/φ38mm
电源接驳	380V/3P+N+E/50Hz

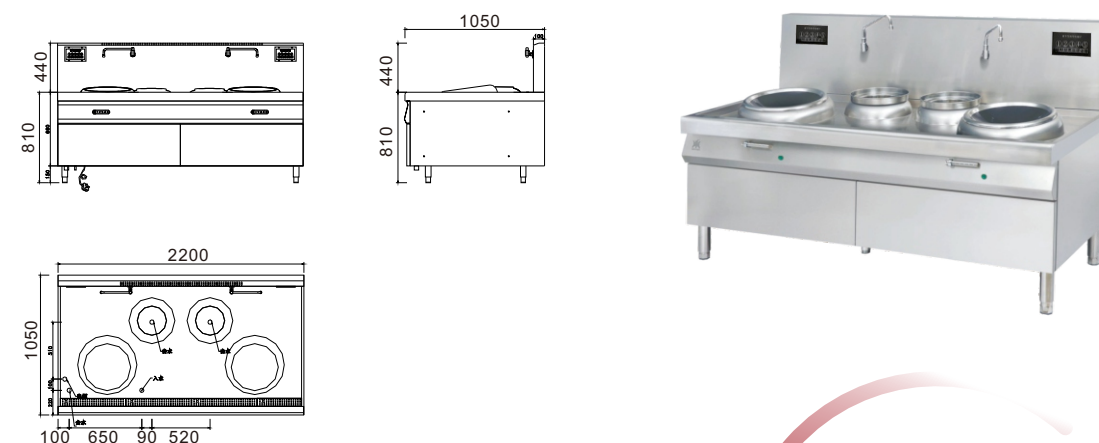


可选配件 Optional Accessories

电磁炉专用锅
(φ500/φ550/φ600)

Boiling pan for
induction cooker
(φ500/φ550/φ600)


单头单尾电磁炒炉 Single Induction Wok Range

型号	EZC15-DC
尺寸 (W×D×H)mm	1200×1050×(810+440)
热负荷	(15+1) kW
来/去水接驳口	φ15mm/φ38mm
电源接驳	380V3N~

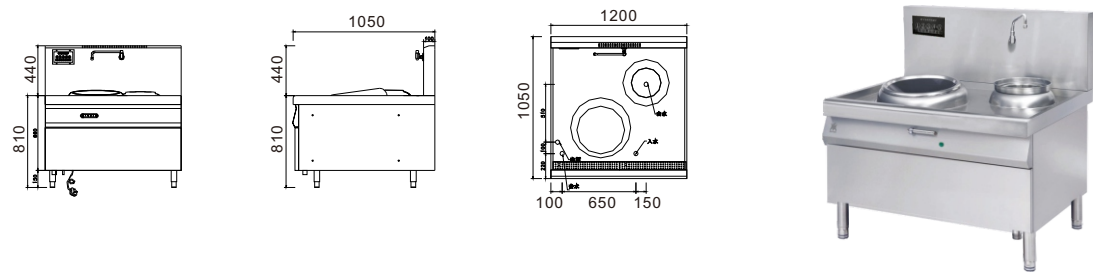


双头单尾电磁炒炉 Dual Induction Wok Range

型号	EZC15/30-DCS
尺寸 (W×D×H)mm	1800×1050×(810+440)
热负荷	(2×15) kW+2kW
来/去水接驳口	φ15mm/φ38mm
电源接驳	380V3N~

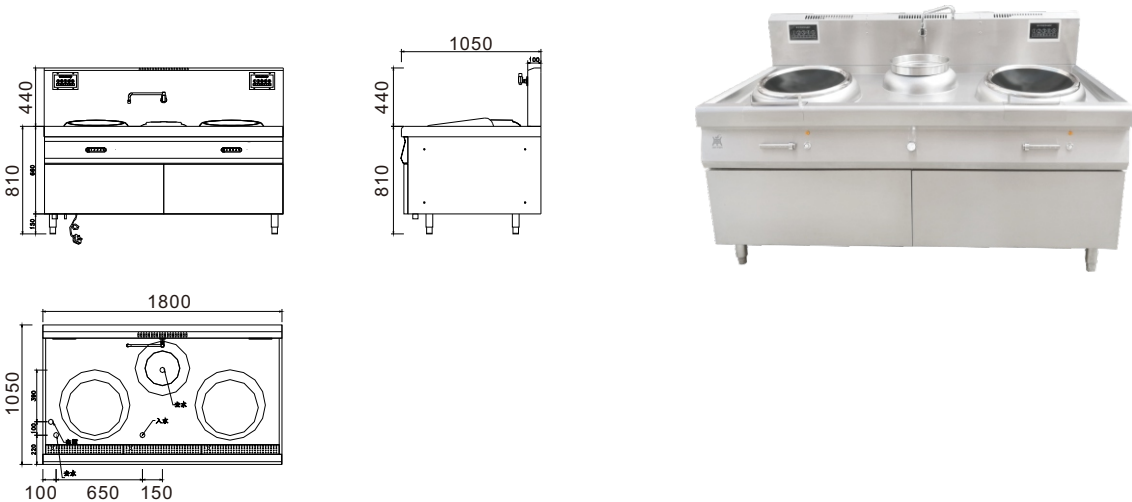


单头电磁大炒炉 Single Large Induction Wok Range

型号	EDG20-DC
尺寸 (W×D×H)mm	1200×1050×(810+440)
热负荷	20kW
来/去水接驳口	φ15mm/φ38mm
电源接驳	380V3N~+N+E/50Hz

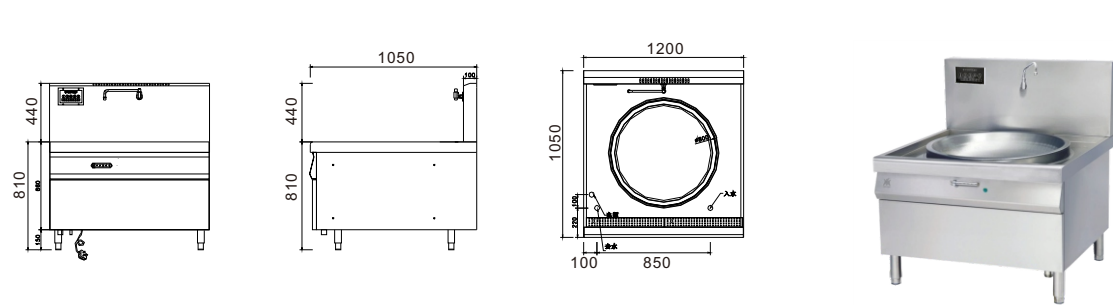


电磁双头大炒炉 Dual Large Induction Wok Range

型号	EDG20/40-DC
尺寸 (W×D×H)mm	2200×1050×(810+440)
热负荷	20kW×2
来/去水接驳口	φ15mm/φ38mm
电源接驳	380V3N~+N+E/50Hz

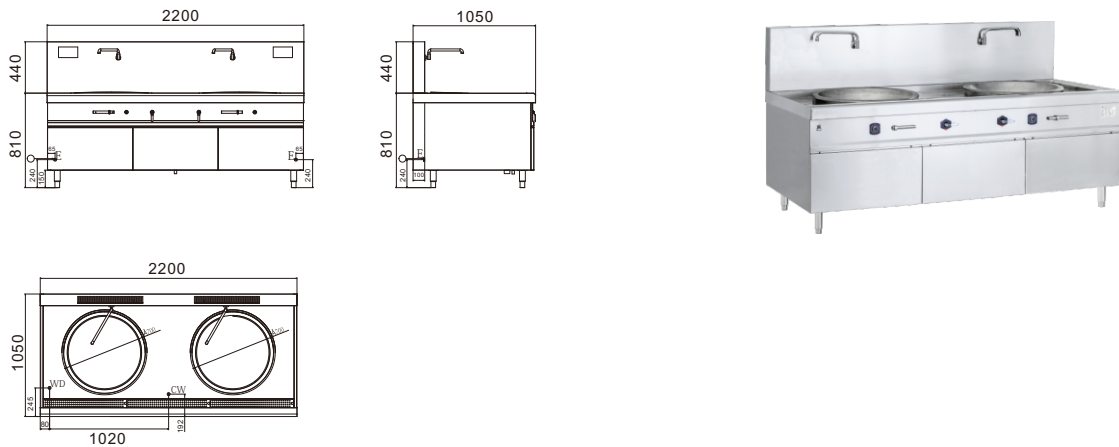


电磁单头矮汤炉 Induction Single Stock Pot Stove

型号	EPT15-DC
尺寸 (W×D×H)mm	600×700×(500+200)
热负荷	15kW
来/去水接驳口	/
电源接驳	380V3N~

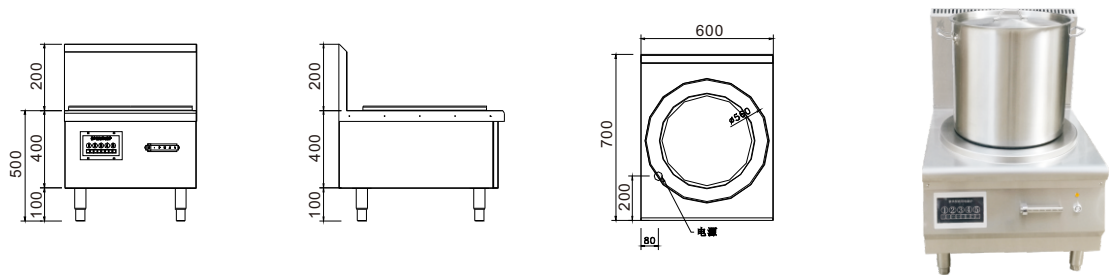

电磁双头矮汤炉 Induction Dual Stock Pot Stove

型号	EPT15/30-DC
尺寸 (W×D×H)mm	1300x700x(500+200)
热负荷	15kWx2
来/去水接驳口	/
电源接驳	380V3N~

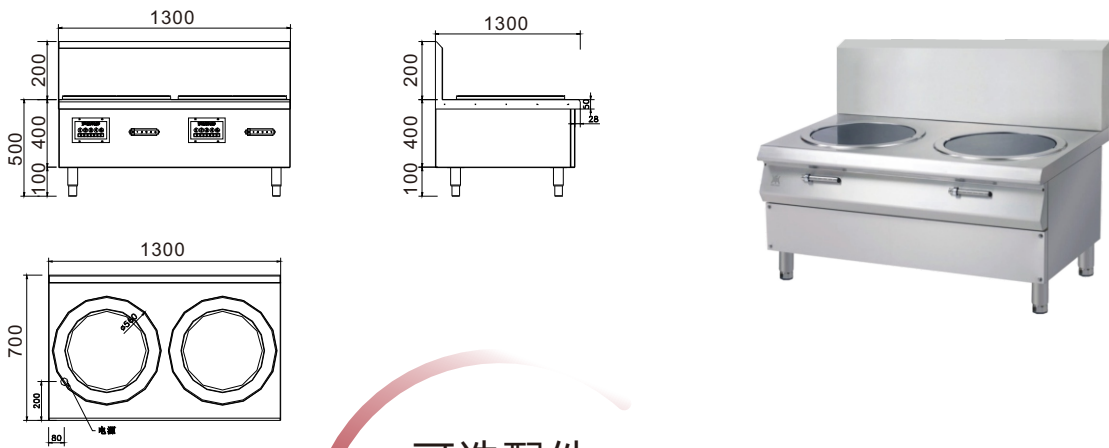

可选配件
Optional Accessories
电磁炉专用复合底汤锅

Boiling pan for
induction cooker
(ø450x500)

